

ALUMINUM LED TRIPROOF LIGHT




FEATURES

- High efficacy 110lm/w, 80Ra
- High performance Epistar chip 2835SMD
- High quality UL or TUV approved power driver
- IP65 and IK08 robust design for industrial use
- Outstanding aluminum heat sink design delivering effective heat transfer
- Clear and milky lens optional


APPLICATIONS

- Warehouse, cold room, workshop, parking lot, damp location, etc.

SIZE in mm

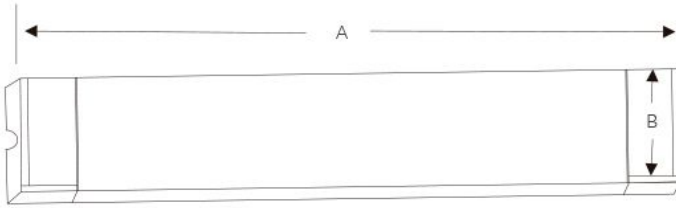

LIGHT DISTRIBUTION CURVE

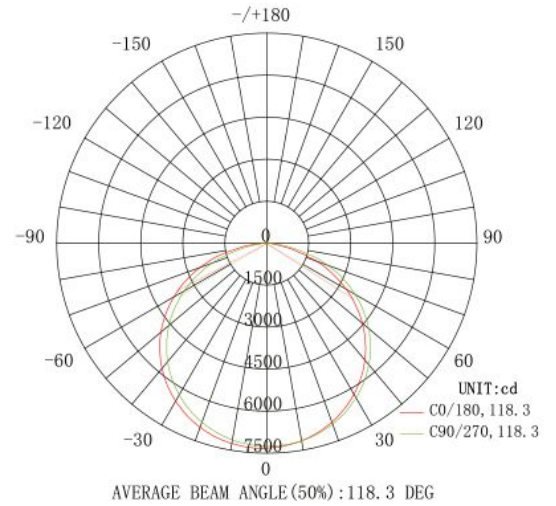

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
DL-TPM-30W	30W	AC100-240V	3,300lm±5%	1.5kg	588×88×75mm	680x260x300mm (6pcs/CTN)
DL-TPM-40W	40W	AC100-240V	4,400LM±5%	2.5kg	1198×88×75mm	1280x260x300mm (6pcs/CTN)
DL-TPM-50W	50W	AC100-240V	5,500LM±5%	3.2kg	1498×88×75mm	1580x260x300mm (6pcs/CTN)