


SLIM LED PANEL LIGHT

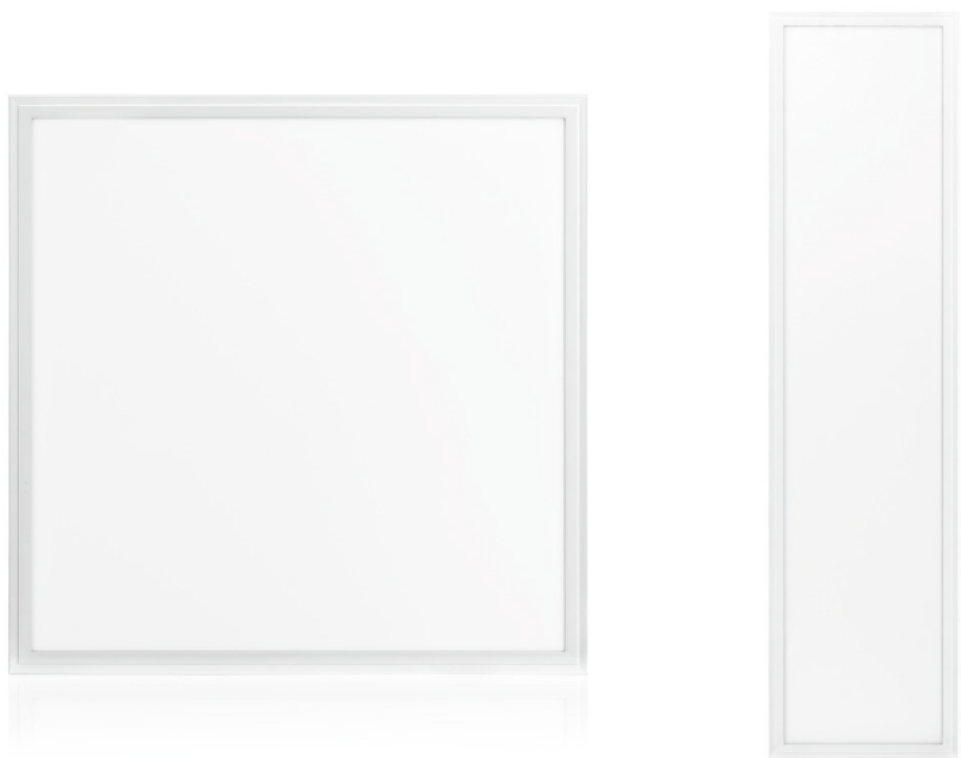


FEATURES

- High efficacy over 100lm/w, 80Ra
- Decent slim design 9mm thickness
- High reliable TUV approved power driver
- Smooth uniform lighting effect
- Flat and step frame design optional
- White and silver finishing frame optional

APPLICATIONS

- Office, hospital, school, meeting room, etc.

SIZE in mm

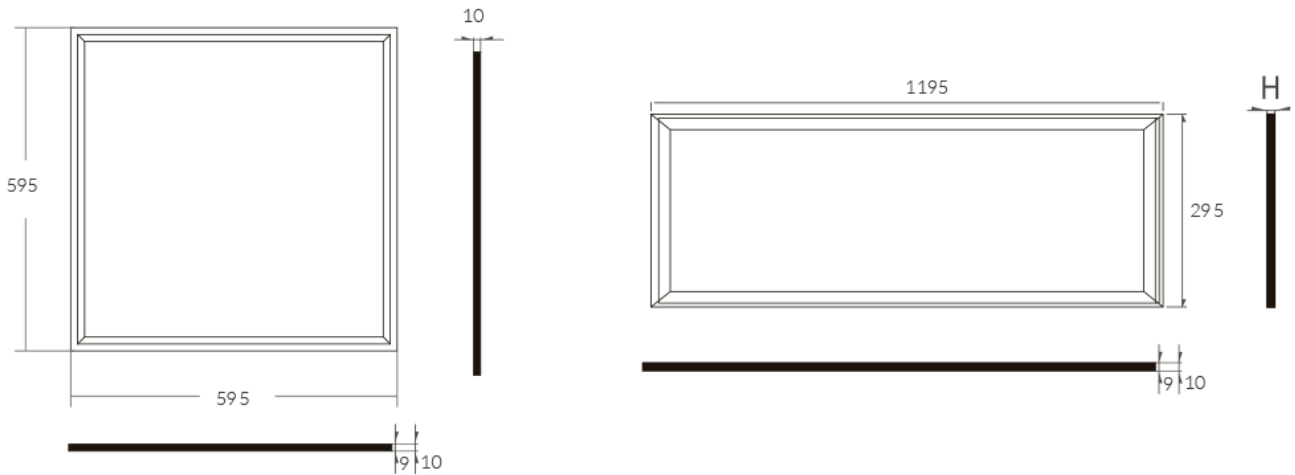

| Item No. | Power | Input Voltage | Lumen Flux | LEDsP | Product weight | Product size | Packing CTN size |
|----------------|-------|---------------|------------|---------|----------------|------------------------------|------------------------------|
| DL-PL3030-10W | 10W | AC100-240V | 1,000LM±5% | 2835SMD | 1kg | 295*295*9mm (300*300mm) | 420*385*390mm (10pcs/CTN) |
| DL-PL3060-18W | 18W | AC100-240V | 1,800LM±5% | 2835SMD | 1.5kg | 295*595*9mm (300*600mm) | 683*226*350mm (5pcs/CTN) |
| DL-PL6060-40W | 40W | AC100-240V | 4,000LM±5% | 2835SMD | 3kg | 595*595*9mm (600*600mm) | 690*210*650mm (5pcs/CTN) |
| DL-PL6060-48W | 48W | AC100-240V | 4,800LM±5% | 2835SMD | 3kg | 595*595*9mm (600*600mm) | 690*210*650mm (5pcs/CTN) |
| DL-PL6262-40W | 40W | AC100-240V | 4,000LM±5% | 2835SMD | 3.2kg | 620*620*9mm | 690*210*650mm (5pcs/CTN) |
| DL-PL6262-48W | 48W | AC100-240V | 4,800LM±5% | 2835SMD | 3.2kg | 620*620*9mm | 690*210*650mm (5pcs/CTN) |
| DL-PL30120-40W | 40W | AC100-240V | 4,000LM±5% | 2835SMD | 3.5kg | 295*1195*9mm (300*1200mm) | 1293*226*350mm (5pcs/CTN) |
| DL-PL60120-72W | 72W | AC100-240V | 7,200LM±5% | 2835SMD | 5.5kg | 595*1195*9mm (600*1200mm) | 1293*95*650mm (2pcs/CTN) |

CCT: 3000K/4000K/6500K