

T8 LED Tube




FEATURES

- High efficacy over 100lm/w
- High reliable power driver
- Robust AL heat sink with PC cover
- Instant start without mercury
- Smooth uniform lighting distribution
- 3 year warranty

APPLICATIONS

- Office, hospital, school, meeting room, etc.

LIGHT DISTRIBUTION CURVE

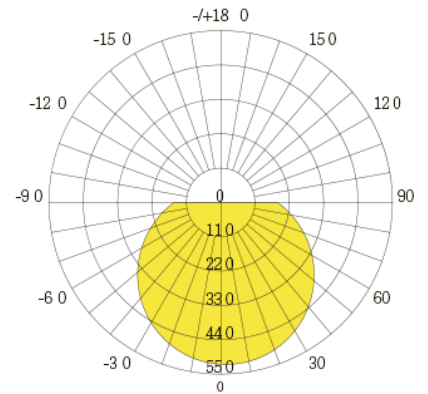

SIZE in mm



Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product Size (D*L)	Packing CTN size
DL-T806010W	10W	AC100-240V	1,000LM±10%	0.14kg	D28*600mm	65X22X22mm (25pcs/CTN)
DL-T812018W	18W	AC100-240V	1,800LM±10%	0.25kg	D28*1200mm	125X22X22mm (25pcs/CTN)
DL-T815022W	22W	AC100-240V	2,200LM±10%	0.3kg	D28*1500mm	155X22X22mm (25pcs/CTN)

CCT: 3000K/4000K/5000K/6500K