

COB Downlight X Series




FEATURES

- Adjustable lighting direction with Horizontal 350° & Vertical 25°
- High performance CITIZEN COB
- Uniform & smooth lighting effect
- High reliable UL approved power driver
- 3 types of optical beam angle solution
- Dimming option: Triac, 0-10V


APPLICATIONS

- Shopping mall, retail store, hotel, supermarket, etc.

SIZE in mm

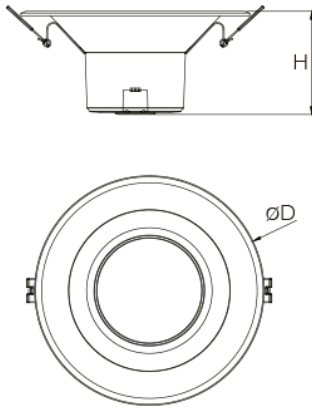

LIGHT DISTRIBUTION CURVE

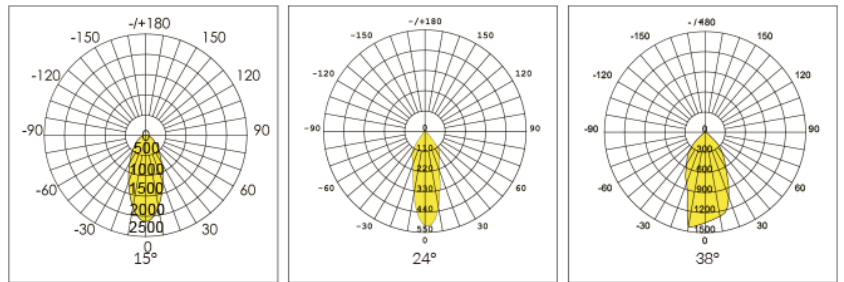

| Item No. | Power | Input Voltage | Lumen Flux | Product weight | Cutout size | Product size (D*H) | Packing CTN size |
|-------------|-------|---------------|------------|----------------|-------------|--------------------|------------------------------|
| DL-DLX-015W | 15W | AC100-277V | 1,050LM±5% | 0.4kg | 70mm | ø95*90mm | 500*480*230mm (40pcs/CTN) |
| DL-DLX-020W | 20W | AC100-277V | 1,700LM±5% | 0.6kg | 90mm | ø115*82mm | 550*310*310mm (20pcs/CTN) |
| DL-DLX-030W | 30W | AC100-277V | 2,600LM±5% | 0.88kg | 125mm | ø140*90mm | 650*360*360mm (20pcs/CTN) |
| DL-DLX-040W | 40W | AC100-277V | 3,300LM±5% | 1.25kg | 145mm | ø160*958mm | 700*405*405mm (20pcs/CTN) |

CCT: 3000K/4000K/6000K