

LED SHOEBOX LIGHT



Slip Fitter




Trunnion



Adjustable Round & Square Pole adaptor



Square Pole Adaptor



Round Pole Adaptor




FEATURES




- Elegant design with outstanding 130lm/w
- High performance Philips 3030SMD
- High performance Meanwell HLG series power driver
- Smart Modularized and quality ADC12 aluminum housing
- Robust IP66 with internal power driver box design, easy for maintenance
- Asymmetric 80°*120° beam angle for roadway, parking lot lighting
- Available in smart photocell sensor function

APPLICATIONS

- Roadway, high way, pedestrian road, parking lot, garden etc.

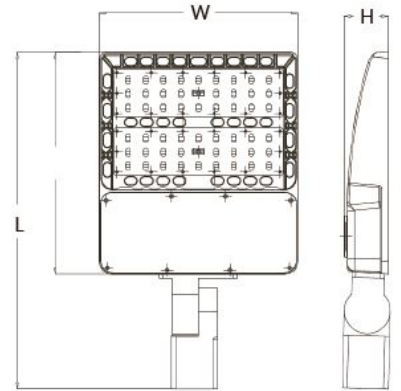

LIGHT DISTRIBUTION CURVE

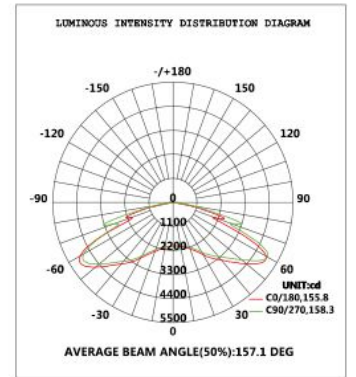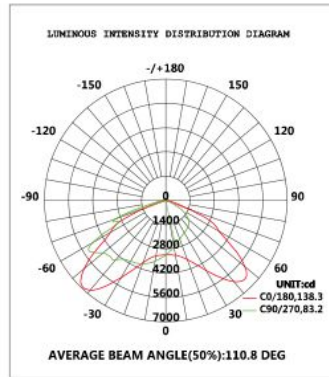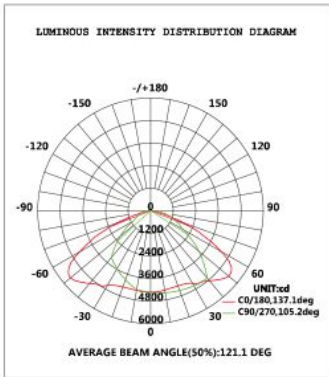

Model No.	Power	Input Voltage	Lumen Flux	LED Q'ty	Housing Color	IP rating	Product weight	Product size
DL-SLH-80W	80W	AC100-277V 50/60Hz	10,400lm±5%	112pcs Philips 3030	Bronze	IP66	6kg	535x316 x70 mm
DL-SLH-100W	100W	AC100-277V 50/60Hz	13,000lm±5%	168pcs Philips 3030	Bronze	IP66	6.3kg	535x316 x70 mm
DL-SLH-150W	150W	AC100-277V 50/60Hz	19,500lm±5%	224pcs Philips 3030	Bronze	IP66	6.6kg	535x316 x70 mm
DL-SLH-200W	200W	AC100-277V 50/60Hz	26,000lm±5%	252pcs Philips 3030	Bronze	IP66	8.5kg	626x316x70mm
DL-SLH-240W	240W	AC100-277V 50/60Hz	31,200lm±5%	336pcs Philips 3030	Bronze	IP66	8.7kg	626x316x70mm
DL-SLH-300W	300W	AC100-277V 50/60Hz	39,000lm±5%	448pcs Philips 3030	Bronze	IP66	9.7kg	710x316x70 mm

CCT: 3000K/4000K/6500K Beam Angle: 80° 120°, 105° 150°, 120° 160°