


## LED FLOOD LIGHT (F SERIES)




## FEATURES

- High efficacy 100lm/w with robust design
- High quality Meanwell or TUV approved power driver
- 4 mm tempered glass, 180° adjustable bracket
- Respirator design for 150W and 200W, balance pressure between internal and external lamp
- Outstanding cooling fins and zipped fins heat thermal management
- IP65 and IK08 waterproof for industrial use

## APPLICATIONS


- Billboard, parking lot, building plaza, roadway, etc.

## SIZE in mm

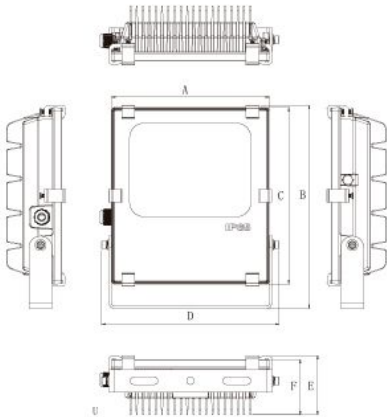

Power (W)	A	B	C	D	E	F
10	111	158.5	130	132	53.17	48.8
20	155	203	174	176.4	63.77	59.4
30	170	219	190	191.4	63.77	59.4
50	281	234	234	220.3	112.77	108.4
100	143.9	182.23	250	270	309	267.5
150	151.9	186.73	274	315	364.5	398.2
180	169.9	196.73	320	380	464.75	344.2

## LIGHT DISTRIBUTION CURVE

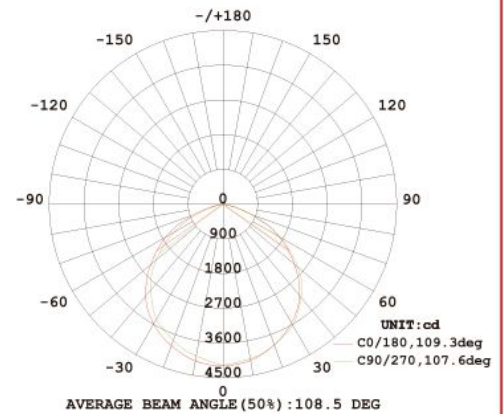

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
DL-FLF-10W	10W	AC100-240V	1,000lm±10%	0.68kg	130x110x51 mm	425x380x257mm (24pc/CTN)
DL-FLF-20W	20W	AC100-240V	2,000lm±10%	1.2kg	175x156x60 mm	480x380x365mm (20pc/CTN)
DL-FLF-30W	30W	AC100-240V	3,000LM±10%	1.56kg	192x172x60 mm	510x400x295mm (16pc/CTN)
DL-FLF-50W	50W	AC100-240V	5,000LM±10%	2.23kg	235x200x67 mm	500x325x320mm (8pc/CTN)
DL-FLF-100W	100W	AC100-240V	10,000LM±10%	5.1kg	360x290x95 mm	420x355x460mm (4pc/CTN)
DL-FLF-150W	150W	AC100-240V	15,000LM±10%	6kg	270x250x155 mm	390x340x260mm (1pc/CTN)
DL-FLF-200W	200W	AC100-240V	20,000LM±10%	8.3kg	387x280x189 mm	390x380x270mm (1pc/CTN)

CCT: 3000K/4000K/6500K