

PLASTIC LED TRIPROOF LIGHT




FEATURES

- High efficacy 110lm/w, 80Ra
- High performance Epistar chip 2835SMD
- High quality UL or TUV approved power driver
- Robust IP65 rated with corrosive-proof, dust-proof design for industrial use
- Decent PC housing with optional plastic or metal clip
- Clear and milky lens optional


APPLICATIONS

- Warehouse, cold room, workshop, parking lot, damp location, etc.

SIZE in mm

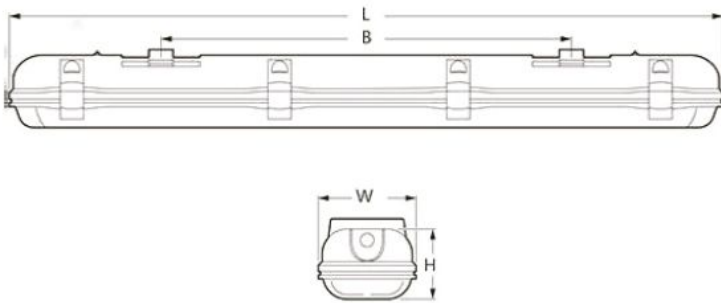

LIGHT DISTRIBUTION CURVE

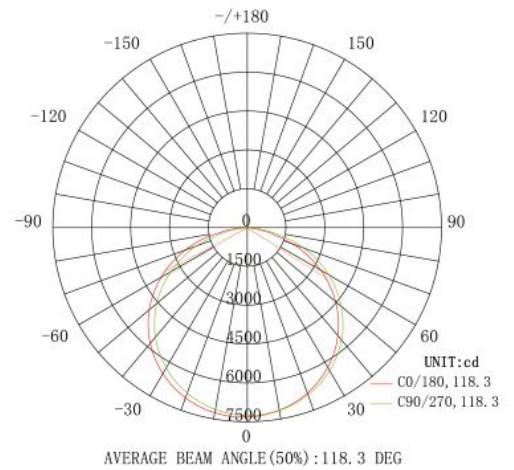

Model No.	Power	Input Voltage	Product size	Lumen Flux	Product weight	Packing CTN
DL-TPP-20W	20W	AC100-240V 50/60Hz	600*105*78mm	2,300lm±5%	1.2kg	620×320×240 mm (8pcs/CTN)
DL-TPP-40W	40W	AC100-240V 50/60Hz	1200*105*78mm	4,400LM±5%	2.4kg	1220×320×240 mm (8pcs/CTN)
DL-TPP-50W	50W	AC100-240V 50/60Hz	1500*105*78mm	5,500LM±5%	3.1kg	1520×270×240 mm (6pcs/CTN)